

LTA505-1



Φ52-505 Signal Tower

LTA505-1


High brightness LED light source life of 50,000 hours, saving energy, low heat, no maintenance; product compact structure, there are a variety of mounting brackets; unique flash-type shade, making visibility better light signals; flash type: 40 -60 beats / min; the product can be installed buzzer, volume: 85dB above; material: shade -AS, base -ABS; degree of protection: IP34;




Order Specification

Model :	LTA505-1			
Segments Num. :	1 Segments			
Light Sources :	LED Steady burn/Flashing			
Light Power :	2W			
Speaker Decibels :	85dB (Optional)			
Voltage :	DC12V	DC24V	AC110V	AC220V
Color :	<input checked="" type="checkbox"/> R	<input type="checkbox"/> Y	<input type="checkbox"/> G	<input type="checkbox"/> B <input type="checkbox"/> W
Mounting :	Multifunctional installation			
Optional Function :	T-Steady burn,W-Flashing,TJ-Steady burn with buzzer			
QTY :	-			
Packing Size :	-			
Weight :	-			

Outline

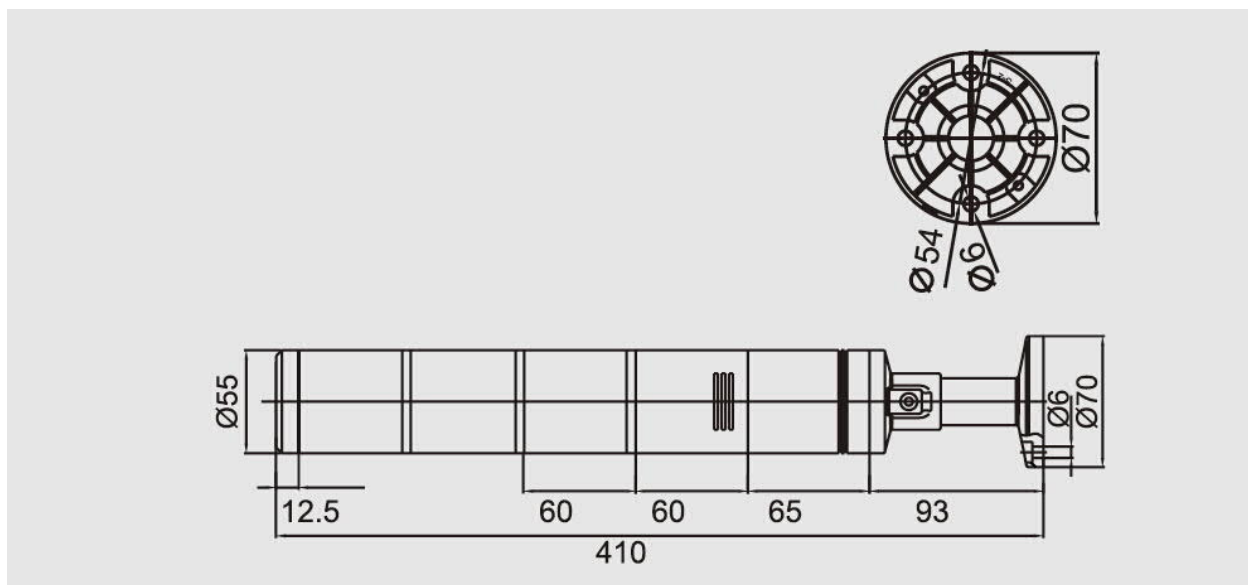

Portfolio of products and accessories schematic

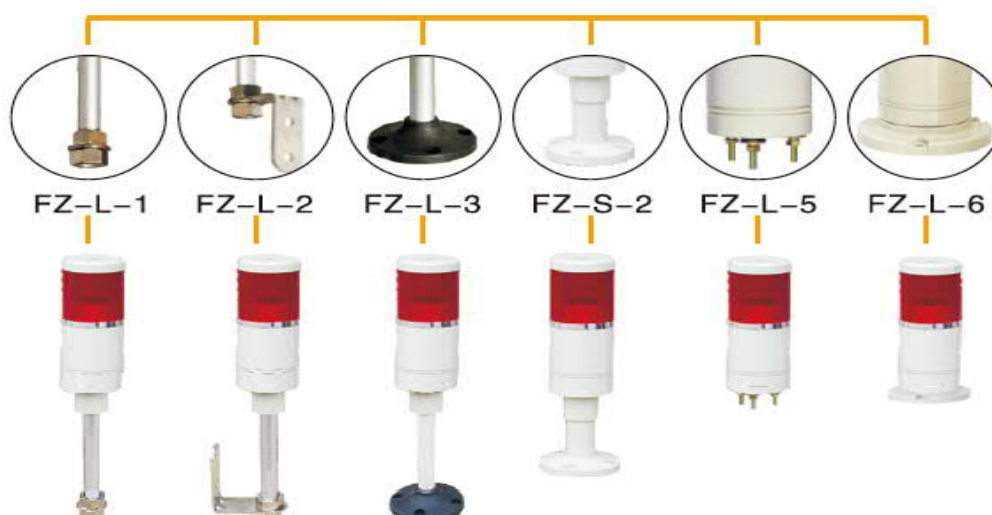

Character

LED Lamp



Surrounded by multi-LED curved design, lighting uniformity, high brightness, no dead spots, no bad.

Speaker



High quality industrial buzzer sound and lig